
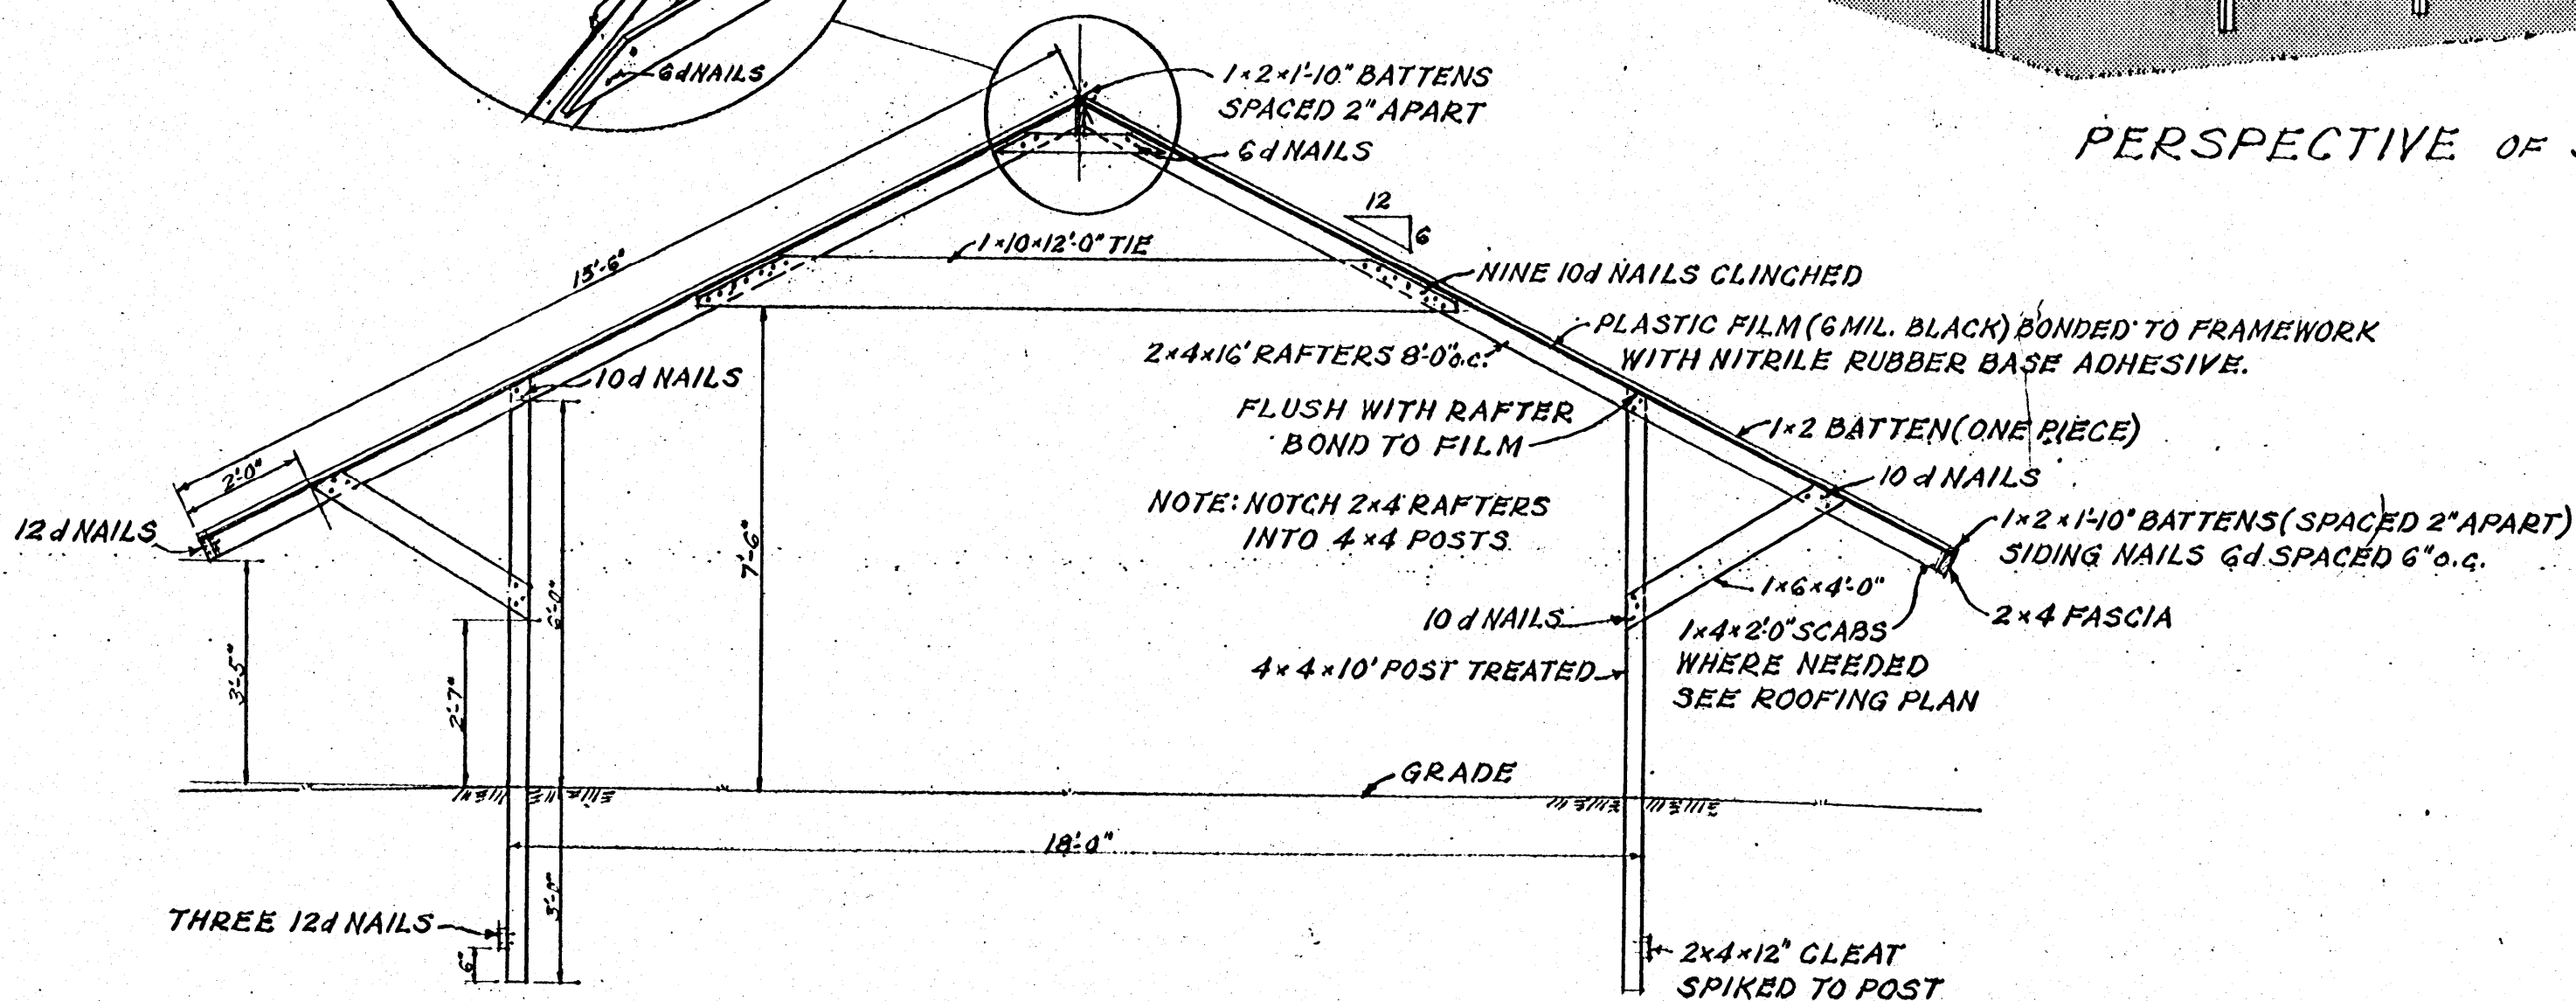


ROOF FRAMING PLAN  
SCALE: 3/16"=1'-0"

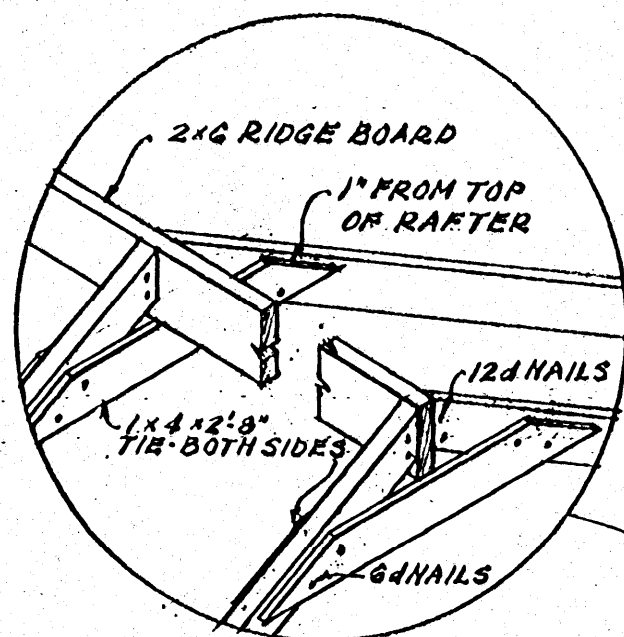


SECTION THRU SHELTER  
SCALE: 3/8"=1'-0"

LIST OF MATERIALS

POSTS.....	14 PCS.....	4x4x10'
RAFTERS.....	14 PCS.....	2x4x16'
RIDGE BOARD.....	1 PC.....	2x6x14'
	3 PCS.....	2x6x12'
FASCIA.....	2 PCS.....	2x4x14'
	6 PCS.....	2x4x12'
BRACES AND SCABS.....	5 PCS.....	1x6x12'
	1 PC.....	1x6x8'
TIES AND SCABS.....	2 PCS.....	1x4x14'
	2 PCS.....	1x4x12'
TIES.....	7 PCS.....	1x10x12'
CLEATS.....	1 PC.....	2x4x14'
BATTENS.....	23 PCS.....	1x2x16'
PLASTIC FILM-BLACK 6MIL.....	1 PC.....	32'x50'
NAILS-SIDING.....	6d.....	4 LB.
	COMMON.....	10d.....
	COMMON.....	12d.....
ADHESIVE.....	CAN.....	1 QT.

NOTE: THIS BUILDING IS DESIGNED TO WITHSTAND A LOAD OF 10 LBS. PER SQ. FT. LOCATE SHELTER WHERE TREE BRANCHES CANNOT FALL AND PUNCTURE THE FILM. ALL LUMBER IN CONTACT WITH THE GROUND SHOULD BE PRESSURE-TREATED WITH A GOOD WOOD PRESERVATIVE. FRAMEWORK AND NAILING STRIPS SHOULD HAVE ROUNDED, SMOOTH EDGES TO AVOID PUNCTURING THE FILM. FILM SHOULD BE APPLIED ON A STILL DAY. ADHESIVE SHOULD BE APPLIED WHEREVER FILM TOUCHES THE FRAMEWORK. APPLY FILM TAUTLY ON COLD DAYS, APPLY FILM LOOSELY ON WARM DAYS. NON-CORROSIVE FASTENINGS SHOULD BE USED THROUGH-OUT.

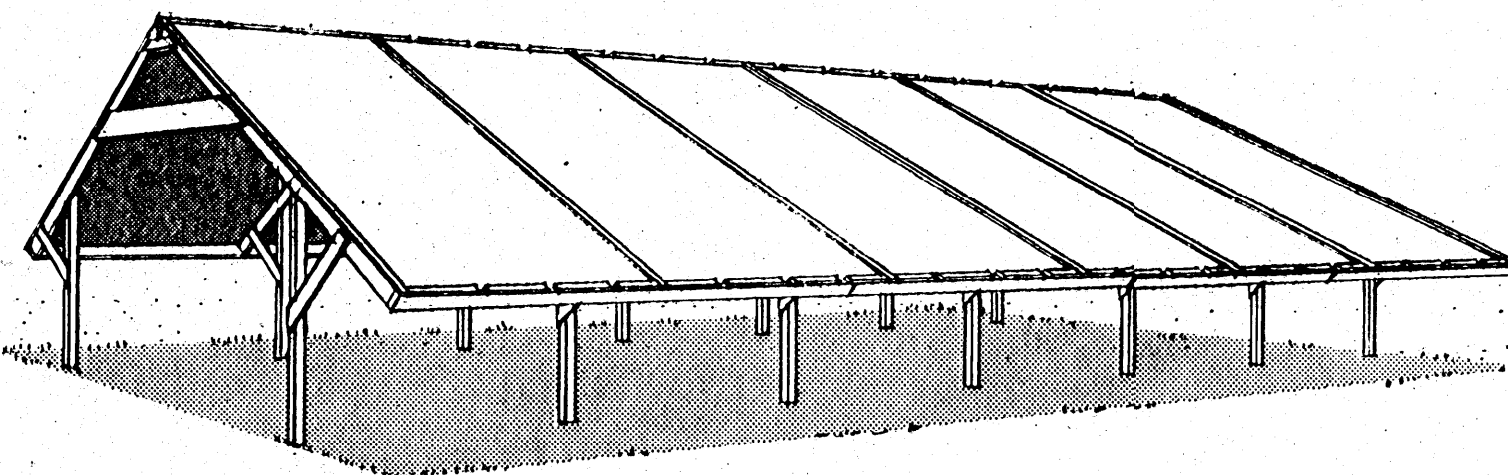

PERSPECTIVE OF SHELTER

COOPERATIVE EXTENSION WORK IN  
AGRICULTURE AND HOME ECONOMICS  
STATE OF MISSISSIPPI  
MISSISSIPPI STATE UNIVERSITY  
AND  
UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING

SHELTER FOR SHEEP

USDA '61 EX. 5926 SHEET 1 OF 1

NOTE: BASED ON STUDIES FROM CALIF.